

Engine:

CAMSHAFT TIMING TAG


MITSUBISHI 6G72

BC0141

Advertised Duration:	<u>ілт</u> 266°	<u>ехн</u> 272°	
Duration @ .050":	204°	212°	
Valve Lift (inches):	.401"	.381"	
Valve Lift (mm):	10.18	9.66	
Valve Lash (inches):	.000"	.000"	

Recommended Valve Spring/Titanium Retainer Kit: BC0140

For best results, install straight up at 0 intake / 0 exhaust and tune from there with adjustable cam sprockets if applicable.

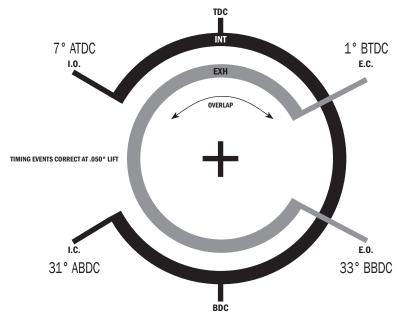

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.

www. Brian Crower.com



Engine:

CAMSHAFT TIMING TAG


MITSUBISHI 6G72

BC0141

Advertised Duration:	INT 266°	<u>ехн</u> 272°
Duration @ .050":	204°	212°
Valve Lift (inches):	.401"	.381"
Valve Lift (mm):	10.18	9.66
Valve Lash (inches):	.000"	.000"

Recommended Valve Spring/Titanium Retainer Kit: BC0140

For best results, install straight up at 0 intake / 0 exhaust and tune from there with adjustable cam sprockets if applicable.

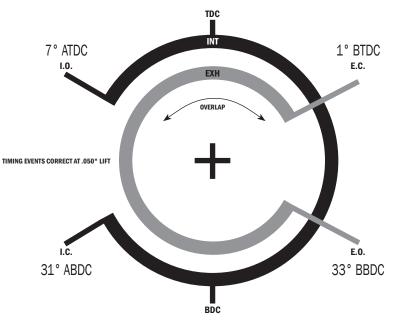

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.

www. Brian Crower.com